
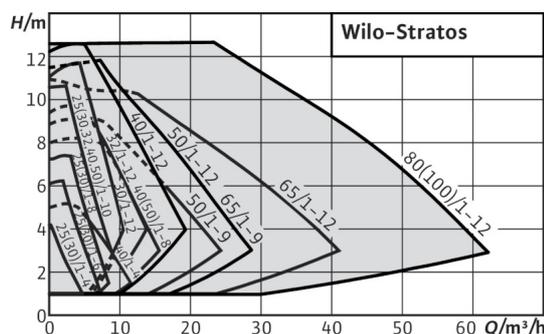


Series description: Wilo-Stratos



Design

Glandless circulation pump with threaded connection or flange connection, EC motor with automatic power adjustment.

Application

Hot-water heating systems of all kinds, air-conditioning systems, closed cooling circuits, industrial circulation systems.

Type key

Example: **Wilo-Stratos 30/1-12**

Stratos	High-efficiency pump (screw-end or flange-end pump), electronically controlled
30/	Nominal connection diameter
1-12	Nominal delivery head range [m]

Special features/product advantages

- Energy efficiency class A
- Highest degrees of efficiency due to ECM technology
- Up to 80% electricity savings compared to uncontrolled circulation pumps
- Front operation and access to the terminal space, variable installation positions, display independent of position
- Simple installation due to combination flanges PN 6/PN 10 (with DN 32 to DN 65)
- Can be used in cooling/air-conditioning systems without ambient temperature limits
- Pump housing with cataphoretic coating for the prevention of corrosion by condensation formation
- System expansion by means of retrofittable interface modules for communication: Modbus, BACnet, CAN, LON, PLR etc.
- Remote operation via infrared interface (IR-Module/IR-Stick/IR-Monitor)

Technical data

- Permissible temperature range -10°C to $+110^{\circ}\text{C}$
- Mains connection 1~230 V, 50/60 Hz
- Protection class IP X4D
- Screwed connection or flange connection (depending on type) Rp 1 to DN 100
- Max. operating pressure, standard version: 6/10 bar or 6 bar (special version: 10 bar or 16 bar)

Equipment/function

Operating modes

- Manual control mode (n=constant)
- Δp -c for constant differential pressure
- Δp -v for variable differential pressure
- Δp -T for temperature-controlled differential pressure (programmable via IR-Module, IR-Stick, IR-Monitor, Modbus, BACnet, LON or CAN)

Manual functions

- Operating mode setting
- Differential-pressure setpoint setting
- Setting automatic setback operation
- Pump ON/OFF setting
- Speed setting (manual control mode)

Automatic functions

- Stageless power adjustment depending on the operating mode
- Automatic setback operation
- Deblocking function
- Soft start
- Full motor protection with integrated trip electronics

External control functions

- "Overriding Off" control input (possible with Stratos IF-Modules)
- "Overriding Min" control input (possible with Stratos IF-Modules)
- "Analogue In 0-10 V" control input (remote speed adjustment) (possible with Stratos IF-Modules)
- "Analogue In 0-10 V" control input (remote setpoint adjustment) (possible with Stratos IF-Modules)

Signal and display functions

- Collective fault signal (potential-free NC contact)
- Individual run signal (potential-free NO contact) (possible with Stratos IF-Modules)
- Fault signal light
- LC display for indication of pump data and fault codes

Data exchange

- Infrared interface for wireless data exchange with IR-Module/IR-Stick/IR-Monitor
- Serial digital interface Modbus RTU for connection to building automation BA via BUS system RS485 (possible with IF-Modules Stratos).
- Serial digital interface BACnet MS/TP Slave for connection to building automation BA via BUS system RS485 (possible with IF-Modules Stratos).
- Serial digital interface CAN for connection to building automation BA via BUS system CAN (possible with IF-Modules Stratos).
- Serial digital LON interface for connection to a LONWorks network (possible with Stratos IF-Modules)
- Serial digital PLR interface for connection to BA via Wilo interface converter or company-specific coupling modules (possible with Stratos IF-Modules)

Dual pump management (double pump or 2 x single pump)

- Main/standby mode (automatic fault-actuated switchover/time-dependent pump cycling): Various combinations with Stratos IF-Modules (accessories) possible
- Parallel operation (efficiency-optimised peak load activation and

Series description: Wilo-Stratos

deactivation): Various combinations with Stratos IF-Modules (accessories) possible

Equipment

- Wrench attachment point at pump body (for threaded pipe union pumps with $P_2 < 100$ W)
- In flange pumps: Flange versions
 - Standard version for pumps DN 32 to DN 65: Combination flange PN 6/10 (flange PN 16 acc. to EN 1092-2) for counter flanges PN 6 and PN 16
 - Standard version for pumps DN 80 / DN 100: Flange PN 6 (configured for PN 16 acc. to EN 1092-2) for counter flange PN 6
 - Special version for pumps DN 32 to DN 100: Flange PN 16 (acc. to EN 1092-2) for counter flange PN 16
- Plug-in position for optional extension with Wilo-IFModules
- Standard thermal insulation for heating applications

Materials

- Pump housing: Grey cast iron with cathoretic coating
- Thermal insulation: Polypropylene
- Shaft: stainless steel
- Bearing: Carbon, metal impregnated
- Impeller: Plastic

Scope of delivery

- Pump
- Including thermal insulation
- Including seals for threaded connection
- Incl. washers for flange screws (for nominal connection diameters DN 32 DN 65)
- Including installation and operating instructions

Options


- Special versions for operating pressure PN 16 (at additional charge)

Accessories

- Screwed connection for threaded connection
- Adapter fittings
- IR-Module
- IR-Stick
- IR-Monitor
- Stratos IF-Modules: Modbus, BACnet, CAN, LON, PLR, DP, Ext. Off, Ext. Min., SBM, Ext. Off/SBM

Duty chart: Wilo-Stratos

Duty chart

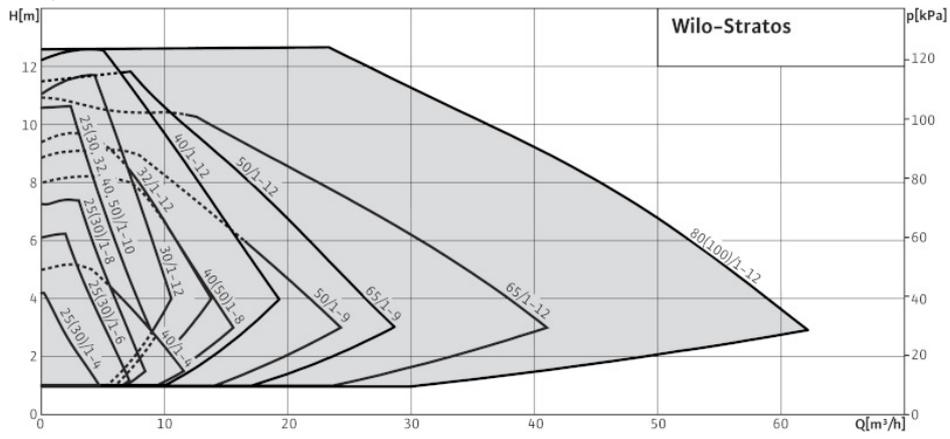

Product list: Wilo-Stratos

Type	Max. volume flow	Max. delivery head	Pipe connection	Nominal flange diameter	Rated pressure	Overall length	EEl Class	Mains connection	Gross weight	Art no.
	$Q_{max}/m^3/h$	H_{max}/m			PN / bar	l_0/mm			m / kg	
Stratos 25/1-4	5	4	Rp 1		10	180	A	1~230 V, 50/60 Hz	5.5	2104225
Stratos 25/1-6	7	6	Rp 1		10	180	A	1~230 V, 50/60 Hz	5.5	2090447
Stratos 25/1-8	8	7	Rp 1		10	180	A	1~230 V, 50/60 Hz	5.5	2090448
Stratos 25/1-10	9	10	Rp 1		10	180	A	1~230 V, 50/60 Hz	5.5	2103615
Stratos 30/1-4	5	4	Rp 1¼		10	180	A	1~230 V, 50/60 Hz	6	2104226
Stratos 30/1-6	7	6	Rp 1¼		10	180	A	1~230 V, 50/60 Hz	5.7	2090449
Stratos 30/1-8	8	7	Rp 1¼		10	180	A	1~230 V, 50/60 Hz	6	2090450
Stratos 30/1-10	9	10	Rp 1¼		10	180	A	1~230 V, 50/60 Hz	5.6	2103616
Stratos 30/1-12	11	11	Rp 1¼		10	180	A	1~230 V, 50/60 Hz	7	2090451
Stratos 32/1-10	10	10		DN 32	6/10	220	A	1~230 V, 50/60 Hz	9.1	2103617
Stratos 32/1-12	13	9		DN 32	6/10	220	A	1~230 V, 50/60 Hz	10.4	2090452
Stratos 40/1-4	11	5		DN 40	6/10	220	A	1~230 V, 50/60 Hz	9.9	2090453
Stratos 40/1-8	15	8		DN 40	6/10	220	A	1~230 V, 50/60 Hz	10.5	2090454
Stratos 40/1-10	10	10		DN 40	6/10	220	A	1~230 V, 50/60 Hz	9.3	2103618
Stratos 40/1-12	19	12		DN 40	6/10	250	A	1~230 V, 50/60 Hz	16.1	2090455
Stratos 50/1-8	15	8		DN 50	6/10	240	A	1~230 V, 50/60 Hz	12.1	2090456
Stratos 50/1-9	24	9		DN 50	6/10	280	A	1~230 V, 50/60 Hz	17.6	2090457
Stratos 50/1-10	10	10		DN 50	6/10	240	A	1~230 V, 50/60 Hz	10.8	2103619
Stratos 50/1-12	29	11		DN 50	6/10	280	A	1~230 V, 50/60 Hz	17.6	2090458
Stratos 65/1-9	29	11		DN 65	6/10	280	A	1~230 V, 50/60 Hz	19.5	2090459
Stratos 65/1-12	41	10		DN 65	6/10	340	A	1~230 V, 50/60 Hz	31	2090460
Stratos 80/1-12	62	13		DN 80	6	360	A	1~230 V, 50/60 Hz	35	2087523
Stratos 80/1-12	62	13		DN 80	10	360	A	1~230 V, 50/60 Hz	35	2087524
Stratos 100/1-12	62	13		DN 100	6	360	A	1~230 V, 50/60 Hz	38	2087525
Stratos 100/1-12	62	13		DN 100	10	360	A	1~230 V, 50/60 Hz	38	2087526